





Short Unit Cuttable
LED Neon Flex
Get a Seamless Joint for Facade Lighting

Overview

The length of LED Neon Flex Light can be adjusted depending on how long the project requires, better adapting to different types of facades and forms with seamless joints. On-site cutting helps reduce waste and prevents length mismatch, greatly improving the convenience of construction.

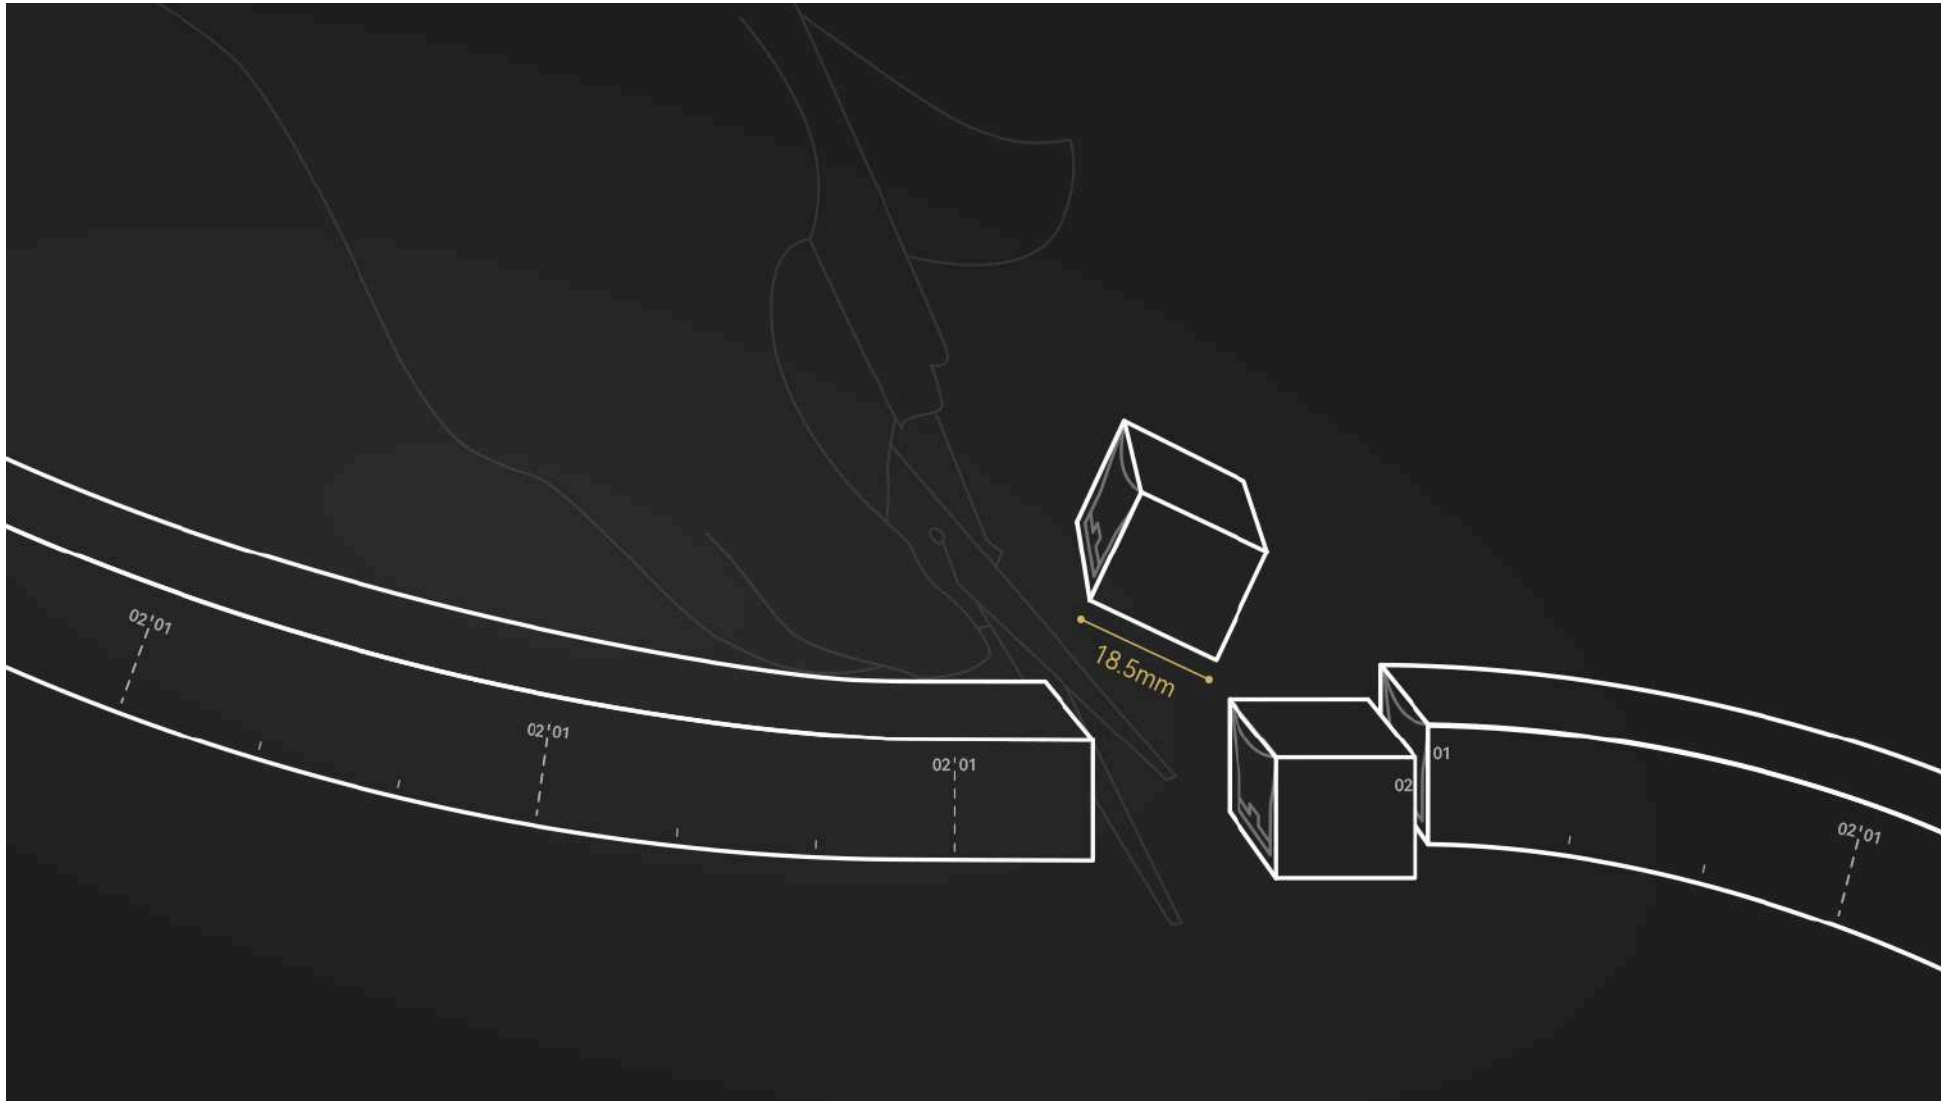

Features

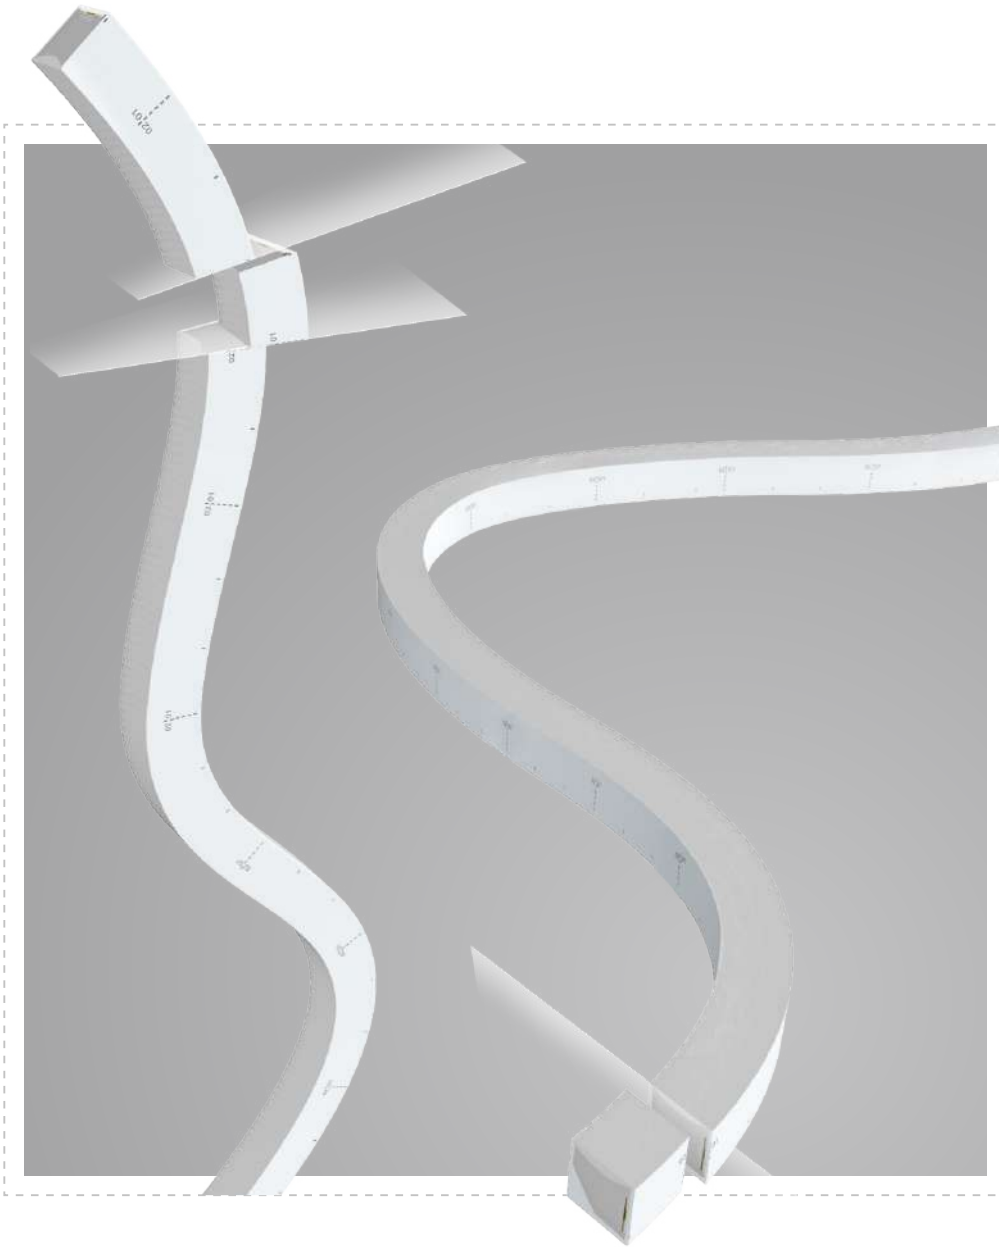

★ Convenient

You can cut the flex light as you like to the same length as the on-site project needs, decreasing replacement and maintenance costs.

★ Designed for Outdoor

High-performance silicone boasts great UV and wind resistance and withstands high/low temperature shocks ranging from $-40\sim 55^{\circ}\text{C}$, which is great for exterior lighting of towers and buildings. The IP68-rated neon flex light is durable and reliable in outdoor conditions and offers a long service life. Dimming/size/bending direction/light color options are available for different facades and installations.



★ Seamless Linear Lighting

The cuttable led neon flex comes with silicone injection moulded connectors with different outlet options, helping produce seamless linear lighting. Even if one bead fails to work, the entire light can still work because of circuit protection.


★ 5 Year Warranty

Provide you with a 5-year warranty to save your energy and costs on maintenance, guaranteed by premium quality of products.

Light - F22

Dimension	Lighting Effect	Category	Item Code	Finished Product						
				Color/CCT	Color/CCT -display	Wavelength/ CCT Tolerance	Color Tolerance	CRI	R9	Lumen/m
 <p>Vertical Bending</p>  <p>Horizontal Bending</p>	B	White Light	C-SFR-F22B-VB-24CV-22K-WM-108-80-12W-18.5	2200K	2200K	2238±66K	<5SDCM	80	N/A	450
			C-SFR-F22B-VB-24CV-27K-WM-108-80-12W-18.5	2700K	2700K	2725±85K	<5SDCM	80	N/A	565
			C-SFR-F22B-VB-24CV-30K-WM-108-80-12W-18.5	3000K	3000K	3045±105K	<5SDCM	80	N/A	565
			C-SFR-F22B-VB-24CV-35K-WM-108-80-12W-18.5	3500K	3500K	3465±245K	<5SDCM	80	N/A	580
			C-SFR-F22B-VB-24CV-40K-WM-108-80-12W-18.5	4000K	4000K	3985±150K	<5SDCM	80	N/A	580
			C-SFR-F22B-VB-24CV-57K-WM-108-80-12W-18.5	5700K	5700K	5669±305K	<5SDCM	80	N/A	580
			C-SFR-F22B-VB-24CV-27K-WM-108-90-12W-18.5	2700K	2700K	2725±85K	<5SDCM	90	35-80	480
			C-SFR-F22B-VB-24CV-30K-WM-108-90-12W-18.5	3000K	3000K	3045±105K	<5SDCM	90	35-80	480
			C-SFR-F22B-HB-24CV-22K-WM-108-80-12W-18.5	2200K	2200K	2238±66K	<5SDCM	80	N/A	380
			C-SFR-F22B-HB-24CV-27K-WM-108-80-12W-18.5	2700K	2700K	2725±85K	<5SDCM	80	N/A	470
			C-SFR-F22B-HB-24CV-30K-WM-108-80-12W-18.5	3000K	3000K	3045±105K	<5SDCM	80	N/A	470
			C-SFR-F22B-HB-24CV-35K-WM-108-80-12W-18.5	3500K	3500K	3465±245K	<5SDCM	80	N/A	480
			C-SFR-F22B-HB-24CV-40K-WM-108-80-12W-18.5	4000K	4000K	3985±150K	<5SDCM	80	N/A	480
			C-SFR-F22B-HB-24CV-57K-WM-108-80-12W-18.5	5700K	5700K	5669±305K	<5SDCM	80	N/A	480
			C-SFR-F22B-HB-24CV-27K-WM-108-90-12W-18.5	2700K	2700K	2725±85K	<5SDCM	90	35-80	420
			C-SFR-F22B-HB-24CV-30K-WM-108-90-12W-18.5	3000K	3000K	3045±105K	<5SDCM	90	35-80	420

Connector

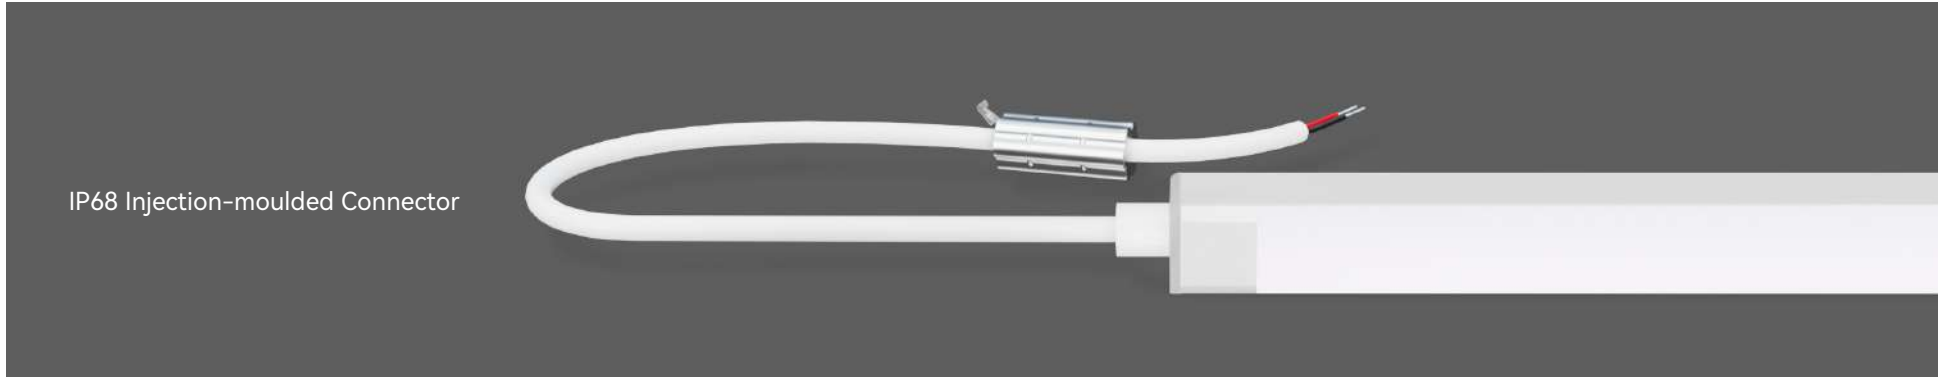

Mounting Profile

Name	Aluminum Profile	Serrated Aluminum Profile	Bendable Serrated Aluminum Profile
Picture			
Item Code	A/PL	SA/PL	BSA/PL
Length (mm)	35, 500, 1000, 2000	20, 500, 1000, 2000	500, 1000
Applicable to			

Application



Nathan 562 Building ▶ Kowloon, Hong Kong



The Campton ▶ Hong Kong



60 Martin Place ▶ Australia



Kanakia Wall Street ▶ India



Coburg Station ▶ Australia